

**ALUMINIUM**  
BI-FOLD DOORS  
PATIO DOORS  
WINDOWS & DOORS  
SHOP FRONTS

**smart** ULTION 





# WHY CHOOSE ALUMINIUM

Renowned for its perfect combination of light weight and high strength, aluminium is the ideal material for sliding, folding doors and windows, providing slim, elegant designs and outstanding performance.

With a life-span measured in decades rather than years, together with extremely low maintenance requirements, aluminium has become the perfect choice for home owners.



# THE SMART CHOICE

All our systems are designed with performance, looks and efficiency in mind, with each frame incorporating a 'thermal-break' to insulate windows and doors against heat loss, raise the internal temperature of a house and help reduce the risk of condensation.

Maintenance for aluminium systems is simple and straightforward, with a routine 'wipe-clean' all that is required to keep the products looking their best. With no requirement for re-painting or re-varnishing, aluminium windows and doors will never fade, deteriorate or rust, even in harsh environments, or coastal locations.

## QUALITY

Each of our products come with all the assurance you would expect from the UK's leading aluminium system.


Manufactured using state-of-the-art machine centres and dedicated production lines ensures you have precision engineered aluminium products every time.

## SAFE & SECURE

Using police approved multi-point locking systems and the UK's most secure cylinder, we really have your security covered.

**Ultions key features include:**

- ◆ Double snap resistance
- ◆ Unique lock down mode
- ◆ 11 Individual pins  
(twice as many as standard cylinders)
- ◆ Nearly 300,000 key combinations
- ◆ Anti drill, pick and bump

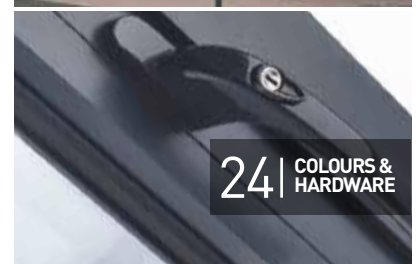



VISO FOLD 1000 SLIM

# BI-FOLD DOORS

FEATURING SMART'S NEW




**QUICK GLAZE** BEAD



Available in a range of opening configurations to suit any application, Visofold doors can be folded internally or externally and with the opening at the side (so the sashes all fold one way), at one end (to create a single entrance door) or in the middle (to give the option of a double door).

Visofold's flexibility makes it the ideal choice for projects where large, uninterrupted openings are required, with the system providing maximum light and space to give unimpeded views.

The highly-versatile, easy-to-operate system is the perfect option for even the largest project, capable of opening up an entire wall, yet presenting a contemporary, elegant glazed façade when closed.

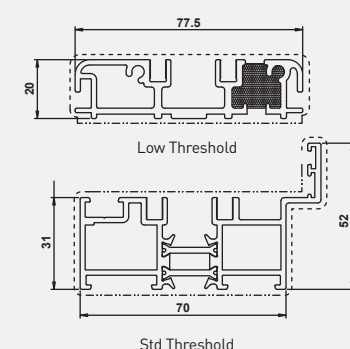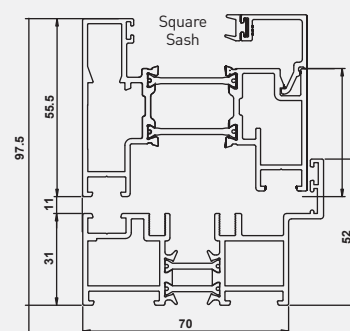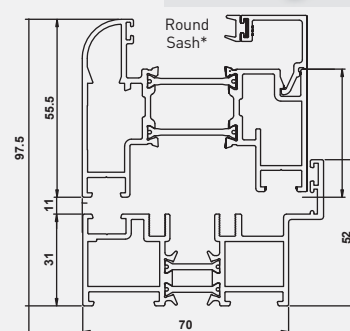

## Visofold 1000

Application	Domestic / Commercial
Finish	Single / Dual colour, marine quality polyester powder coated
Profile	Round / Square
Lock Mechanism	Ultion (diamond accredited) Cylinder as std.- multi-point locking
Frame depth	70mm
Typical sight line	122mm
Max sash weight	100kg
U Value	1.3-1.5 w/m²k
Min - Max o/a height (per sash)	1850 - 2500mm
Min - Max o/a width (per sash)	700 - 1200mm
Security tested	PAS 24: 2012 DOC Q Optional Upgrade
Weather tested	BS 6375 Part 1: 2009
Glazing	DG 28mm, 36mm
Add ons	20mm, 42mm
Bead	Internal Only
Cills	85mm, 150mm, 190mm, 225mm, 300mm
Open In	Yes (Open inward doors have 25mm clearance only)



Visofold 1000 Slim profiles feature a thermal break to deliver enhanced thermal performance and energy efficiency and security is assured by multi-point lock mechanisms on the main opening sashes, and shoot-bolt locks on the 'floating' mullions.

The doors can have either a low threshold for unimpeded access, or a rebated threshold for improved weather resistance.

Visofold 1000 Slim doors are available in a choice of standard or non-standard colours, including metallic, dual colour and unique Sensations range of textured finishes.



*With internal glazing beads preventing the removal of glass from outside, and high security locking mechanisms in the handle, our doors are built to last and to be secure.*




# VISOFOLD 1000 BI-FOLD DOORS



## PROFILE

Square or round  
profile options



## FINISH

Marine quality polyester  
powder coated



## AESTETICS

Slim sightlines of  
just 122mm



## GLAZING

28mm Double  
glazed sealed units



## SECURITY


Secure multipoint locking



ULTION

## ULTION

High security 3 star  
cylinder as standard



## LOW THRESHOLD

20mm aluminium low  
threshold option



## COLOURS

Single or dual colour  
options available






*Our systems have been designed to not only withstand all that the elements can throw at them, but also to deliver minimum heat loss and great thermal efficiency.*

Kitemarked and security-tested to the PAS24 standard, Visofold 1000 slide-folding doors features a choice of internally or externally folding panels, which when open help to integrate the home's external and internal living spaces, offering uninterrupted views.

## CONFIGURATIONS All designs available left or right handed

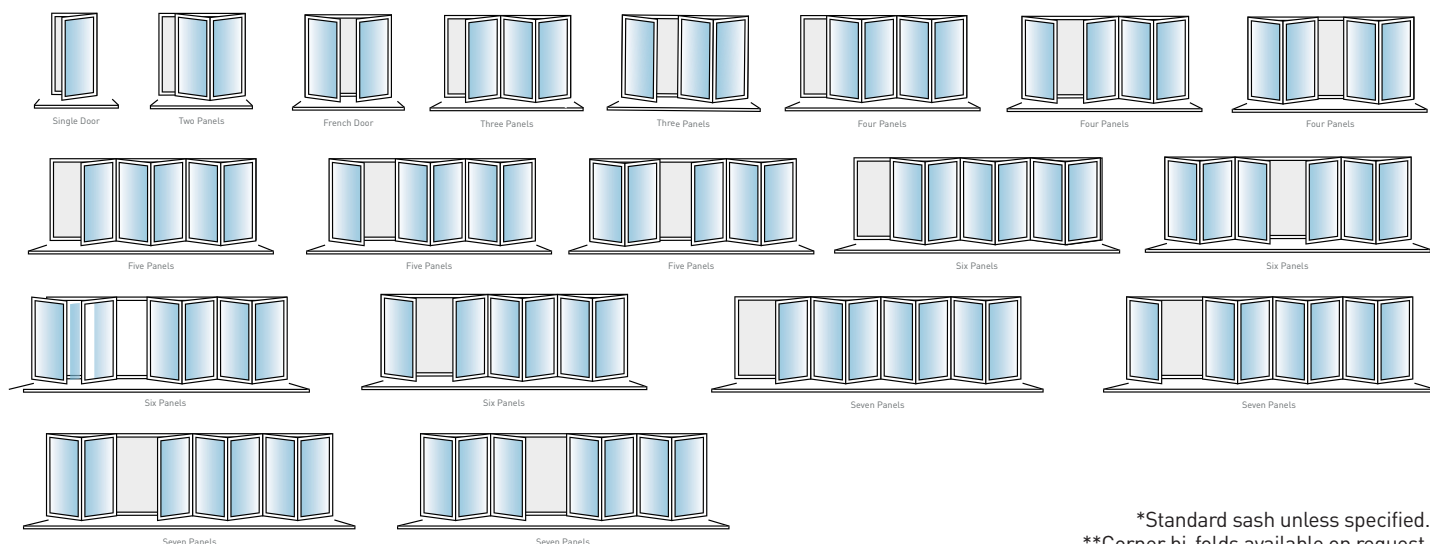




\*Standard sash unless specified.  
\*\*Corner bi-folds available on request.



# VISOGLIDE PLUS PATIO DOORS

Our sliding doors provide the maximum light and afford the most unobstructed views of any system when closed and with our wide range of systems and options, you can select and tailor a door system to exactly meet your own specific requirements.

With a choice of frame sizes, sliding formats whether two, three or four pane systems, together with a choice of high-quality hardware and a wide range of colour options, the slim lines of these elegant doors make them the perfect solution for any home.

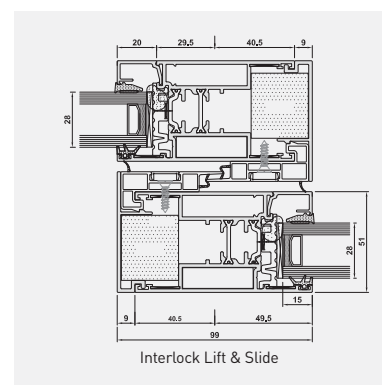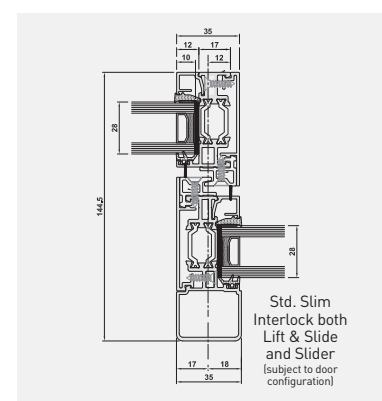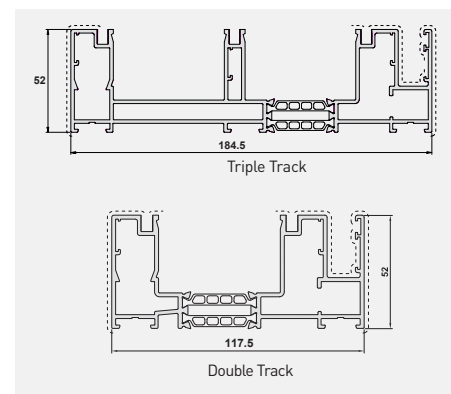

Visoglide Plus	
Application	Domestic / Commercial
Finish	Single / dual colour, marine quality polyester powder coated
Profile	Flat only
Security	Ultion (diamond accredited) Cylinder as std- multi-point locking
Frame depth	117.5mm DT / 184.5mm TT
Max sash weight	250kg
U Value	1.4 - 1.8 w/m²k
Max o/a height (per sash)	2500mm
Max o/a width (per sash)	Within height/weight limitations there is no maximum width
Air Tested	Class 3, 600Pa
Water Tested	Class 7a, 300Pa
Wind Tested	Class AE, 2400Pa
BSA Awards	KM 530838 PAS 24:2012
Glazing	DG 28mm / TG 36mm
Track	Double / Triple Track
Interlock Width	Slider 83mm / Lift & Slide Std 99mm / Slim 35mm Std (subject to configuration)
Add ons	42mm
Bead	Internal Only
Cills	150mm, 190mm, 225mm, 300mm




Combining the benefits of a large picture window, which allows light to flood in to an internal space, with an easy opening operation, Visoglide Plus is a high quality, highly versatile system which is a great option for even the largest project.

Delivering outstanding thermal efficiency, Visoglide Plus offers contemporary styling and robust performance, with the option of slide, or lift and slide operation on double or triple tracks.



# VISOGLIDE PLUS PATIO DOORS



U Value  
1.4-1.8W/m<sup>2</sup>K



Certified  
PAS24:2012



Certified  
BS 6375



Certified  
Document L



Dual  
Colour



Multipoint  
Lock



Max Sash Height  
2500mm



Max Sash Weight  
250kg



Sash Sightline  
83mm



Sash Sightline  
35mm Slim Std.



## SECURITY

Secure multipoint  
locking



## EFFICIENT

Thermally efficient U Value  
of between 1.4 - 1.8W/m<sup>2</sup>k

## GLAZING

Double or triple  
glazed options



## COLOURS

Single or dual colour  
options available



## FINISH

Marine quality polyester  
powder coated



## INTERLOCK


35mm or 83mm  
interlock options

## ULTION



## ULTION

High security 3 star  
cylinder as standard



## TRACK

Double or Triple  
Track options





*Our systems have been designed to match a wide range of property styles. With our innovative folding panelled structure, they can provide the perfect transition from inside your home to outside*




This high performance contemporary system features large sash sizes and is ideal for even the most demanding applications.

Available in dual colour and with a large thermal break, Visoglide delivers outstanding thermal performance for enhanced comfort and economy.

*Open up a wall to create a relaxed feeling of light and space and to frame the beautiful views of the garden and beyond.*

## CONFIGURATIONS

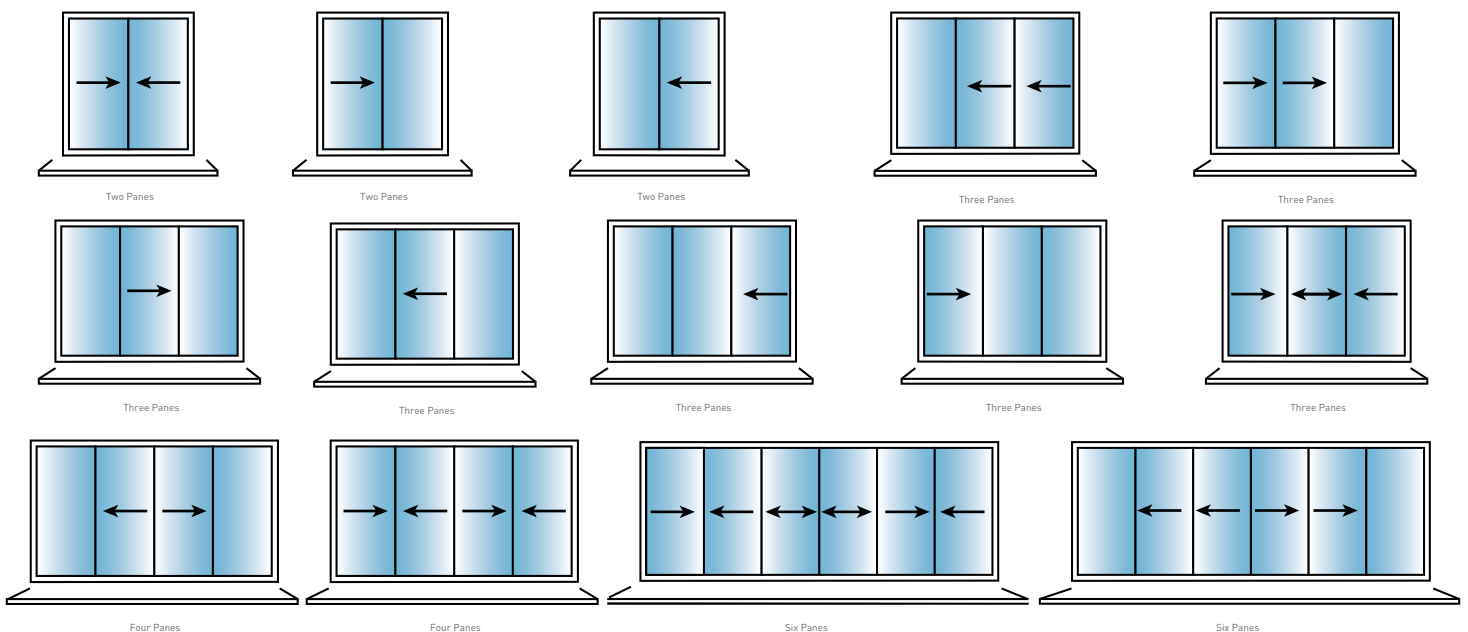




# ALITHERM 600 WINDOWS

This versatile range of profiles can provide many solutions for residential and light commercial applications. It can create traditional casement windows inspired by the elegance and styling of timber products, or contemporary style windows designed for modern homes or offices.

Alitherm profiles utilise Smart's innovative polyamide thermal break technology which creates a barrier between the cold air outside and the warm air inside. This technology significantly reduces thermal transmittance and enhances the overall U Value of a product and is designed to meet the exacting requirements of Document L 2010.

## Alitherm 600 Windows

Application	Domestic / Commercial
Finish	Single / dual colour, marine quality polyester powder coated
Profile	Ovolo / Chamfered / Square
Security	Multi-point locking espag, Inline locking handle as standard
Frame depth	70mm
Max weight	50kg TH / 40kg SH
U Value	1.3 - 1.6 w/m <sup>2</sup> k
SH Max o/a width	1000mm
SH Max o/a height	1400mm
TH Max o/a width	1400mm
TH Max o/a height	1500mm
WER	B - C
Air Tested	Class 3, 600Pa
Water Tested	Class 7a, 300Pa
Wind Tested	Class AE, 2400Pa
British Standards	KM 81580 / PAS 24:2012 / KM81543 / BS4873
Add ons	20mm, 42mm
Bead	Internal / External (Ovolo not available with internal)
Cills	85mm, 150mm, 190mm, 225mm, 300mm
Glazing	DG 28mm / TG 32mm
Astragal Bar	25mm / 41mm flat bar

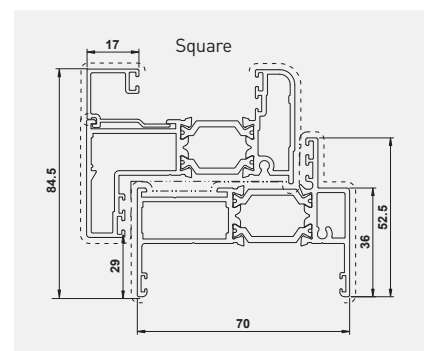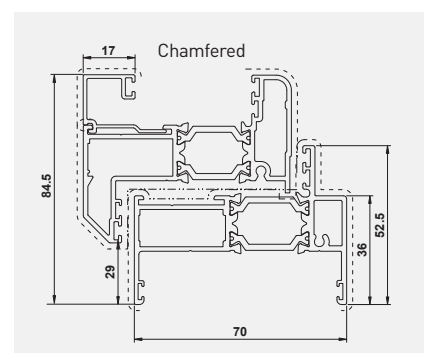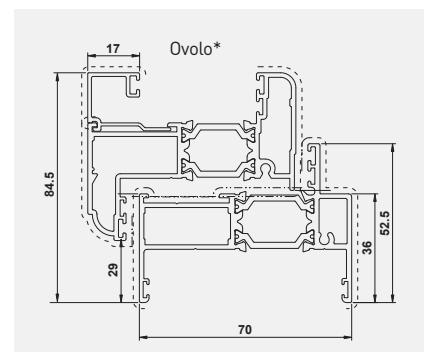

\*Standard sash unless specified (externally beaded)





#### EFFICIENT

Thermally efficient U Value  
of between 1.3 - 1.8W/m<sup>2</sup>K



#### GLAZING

Double and triple  
glazed options

U Value  
1.3-1.6W/m<sup>2</sup>K

Certified  
PAS24:2012

Certified  
BS 4873

Certified  
Document L

TH Max Height  
1500mm

Dual  
Colour

TH Max Width  
1400mm

Multipoint  
Lock Espag

Max Weight  
50kg



#### COLOURS

Single or dual colour,  
marine quality polyester  
powder coated



#### ENERGY SAVING

WER Rating of B - C

#### AESTHETIC

Slim 84.5mm sightlines



#### PROFILE

Ovolo, chamfered and  
square profile options



# ECOFUTURAL WINDOWS




Our outstanding, high-performance window range is brought together under the EcoFutural name, offering a wide choice of options for the ultimate in thermal performance and weather protection.


The range offers a choice of either tilt & turn or fixed windows. The EcoFutural system features our proven chambered polyamide thermal break that creates a barrier between the cold air outside and the warm air inside. This technology significantly reduces thermal transmittance and enhances the overall U-values of every EcoFutural window.

## EcoFutural Tilt and Turn Windows

Application	Commercial / Domestic
Finish	Single / dual colour, marine quality polyester powder coated
Profile Sash	Square
Security	Multi-point locking, Inline locking handle as standard
Frame depth	65mm
Max weight	90kg
U Value	1.1 -1.4 w/m <sup>2</sup> k
SH Max o/a width	1700mm
SH Max o/a height	2500mm
WER	A - C
Air Tested	Class 3, 600Pa
Water Tested	Class 7a, 900Pa
Wind Tested	Class AE, 2400Pa
British Standards	KM 81580 / PAS 24:2016 / KM81543 / BS6375
Add ons	20mm, 42mm
Bead	Internal
Cills	85mm, 150mm, 190mm, 225mm, 300mm
Glazing	DG 28mm
Astragal Bar	25mm / 41mm flat bar

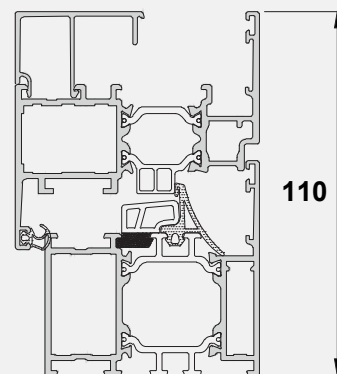

Open Inward Profile

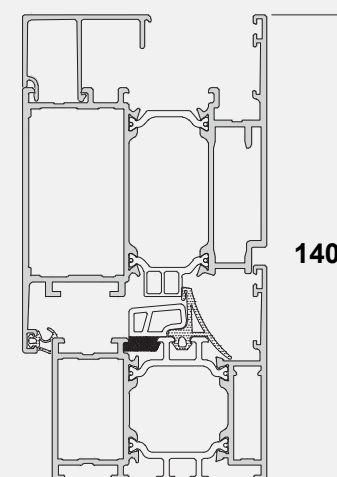

Open Inward Profile

\*Max size subject to height and width ratio.





#### COLOURS

Single or dual colour,  
marine quality polyester  
powder coated



#### ENERGY SAVING

WER Rating of A - C

**EFFICIENT**  
Thermally efficient U Value  
of between 1.1 - 1.4W/m<sup>2</sup>k



**GLAZING**  
Double glazed  
option only



U Value  
1.1 - 1.4W/m<sup>2</sup>K



Certified  
PAS24:2016



Certified  
BS 6375



Certified  
Document L



Dual  
Colour



TT Max Height  
2500mm



TT Max Width  
1700mm




Multipoint  
Locking



Max Weight  
90kg



**AESTHETIC**  
110mm sightlines






**PROFILE**  
Square profile  
option only





# ALITHERM PLUS DOORS

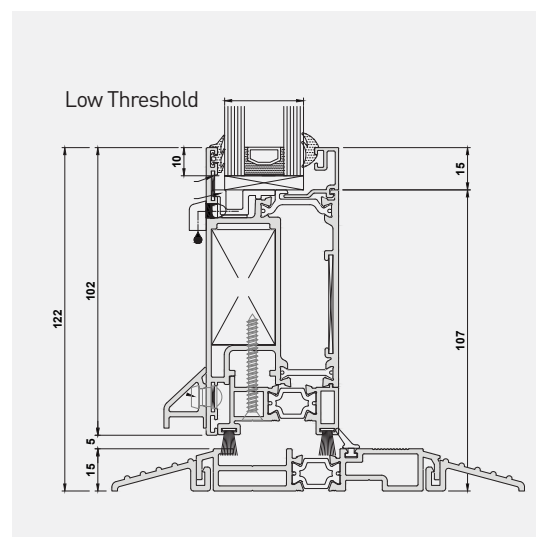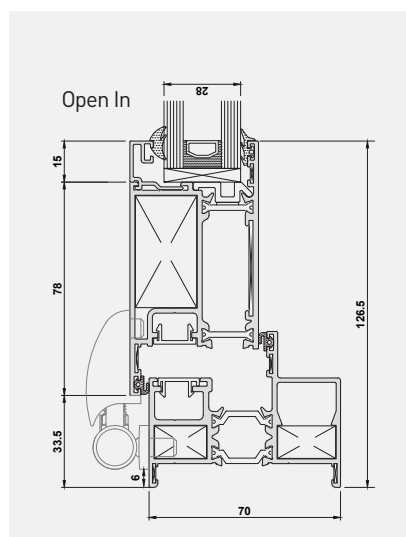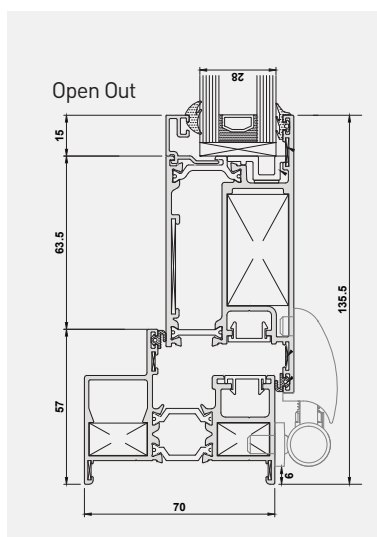

## Alitherm Plus Door


Application	Domestic
Finish	Single / dual colour, marine quality polyester powder coated
Profile	Flat only
Security	Ultion (diamond accredited) Cylinder as standard - multi-point locking
Profile Width	70mm
Max sash weight	100kg
U Value	1.5 - 1.8 w/m²k
Single Door Max Width (mm)	1066mm
Single Door Max Height (mm)	2500mm
Double Door Max Width (mm)	2000mm
Double Door Max Height (mm)	2500mm
BSA Awards	BS 6375-1:2009 PAS 24:2012
Glazing	DG 28mm / TG 32mm
Add ons	20mm, 42mm
Bead	Internal only (sidelights external)
Cills	85mm, 150mm, 190mm, 225mm, 300mm





Our handsome range of entrance doors will impress your guests and keep out both the elements and unwelcome intruders. Our Alitherm doors are designed for use as open out or open in, single or double doors, internally beaded with side-light and low threshold options.

Elegant, yet strong and durable Alitherm doors enhance the beauty of your home, keep in the warmth and let in more light because of the slim sightlines. Peace of mind is ensured by the enhanced security provided by a multi-point locking system and high security cylinder.

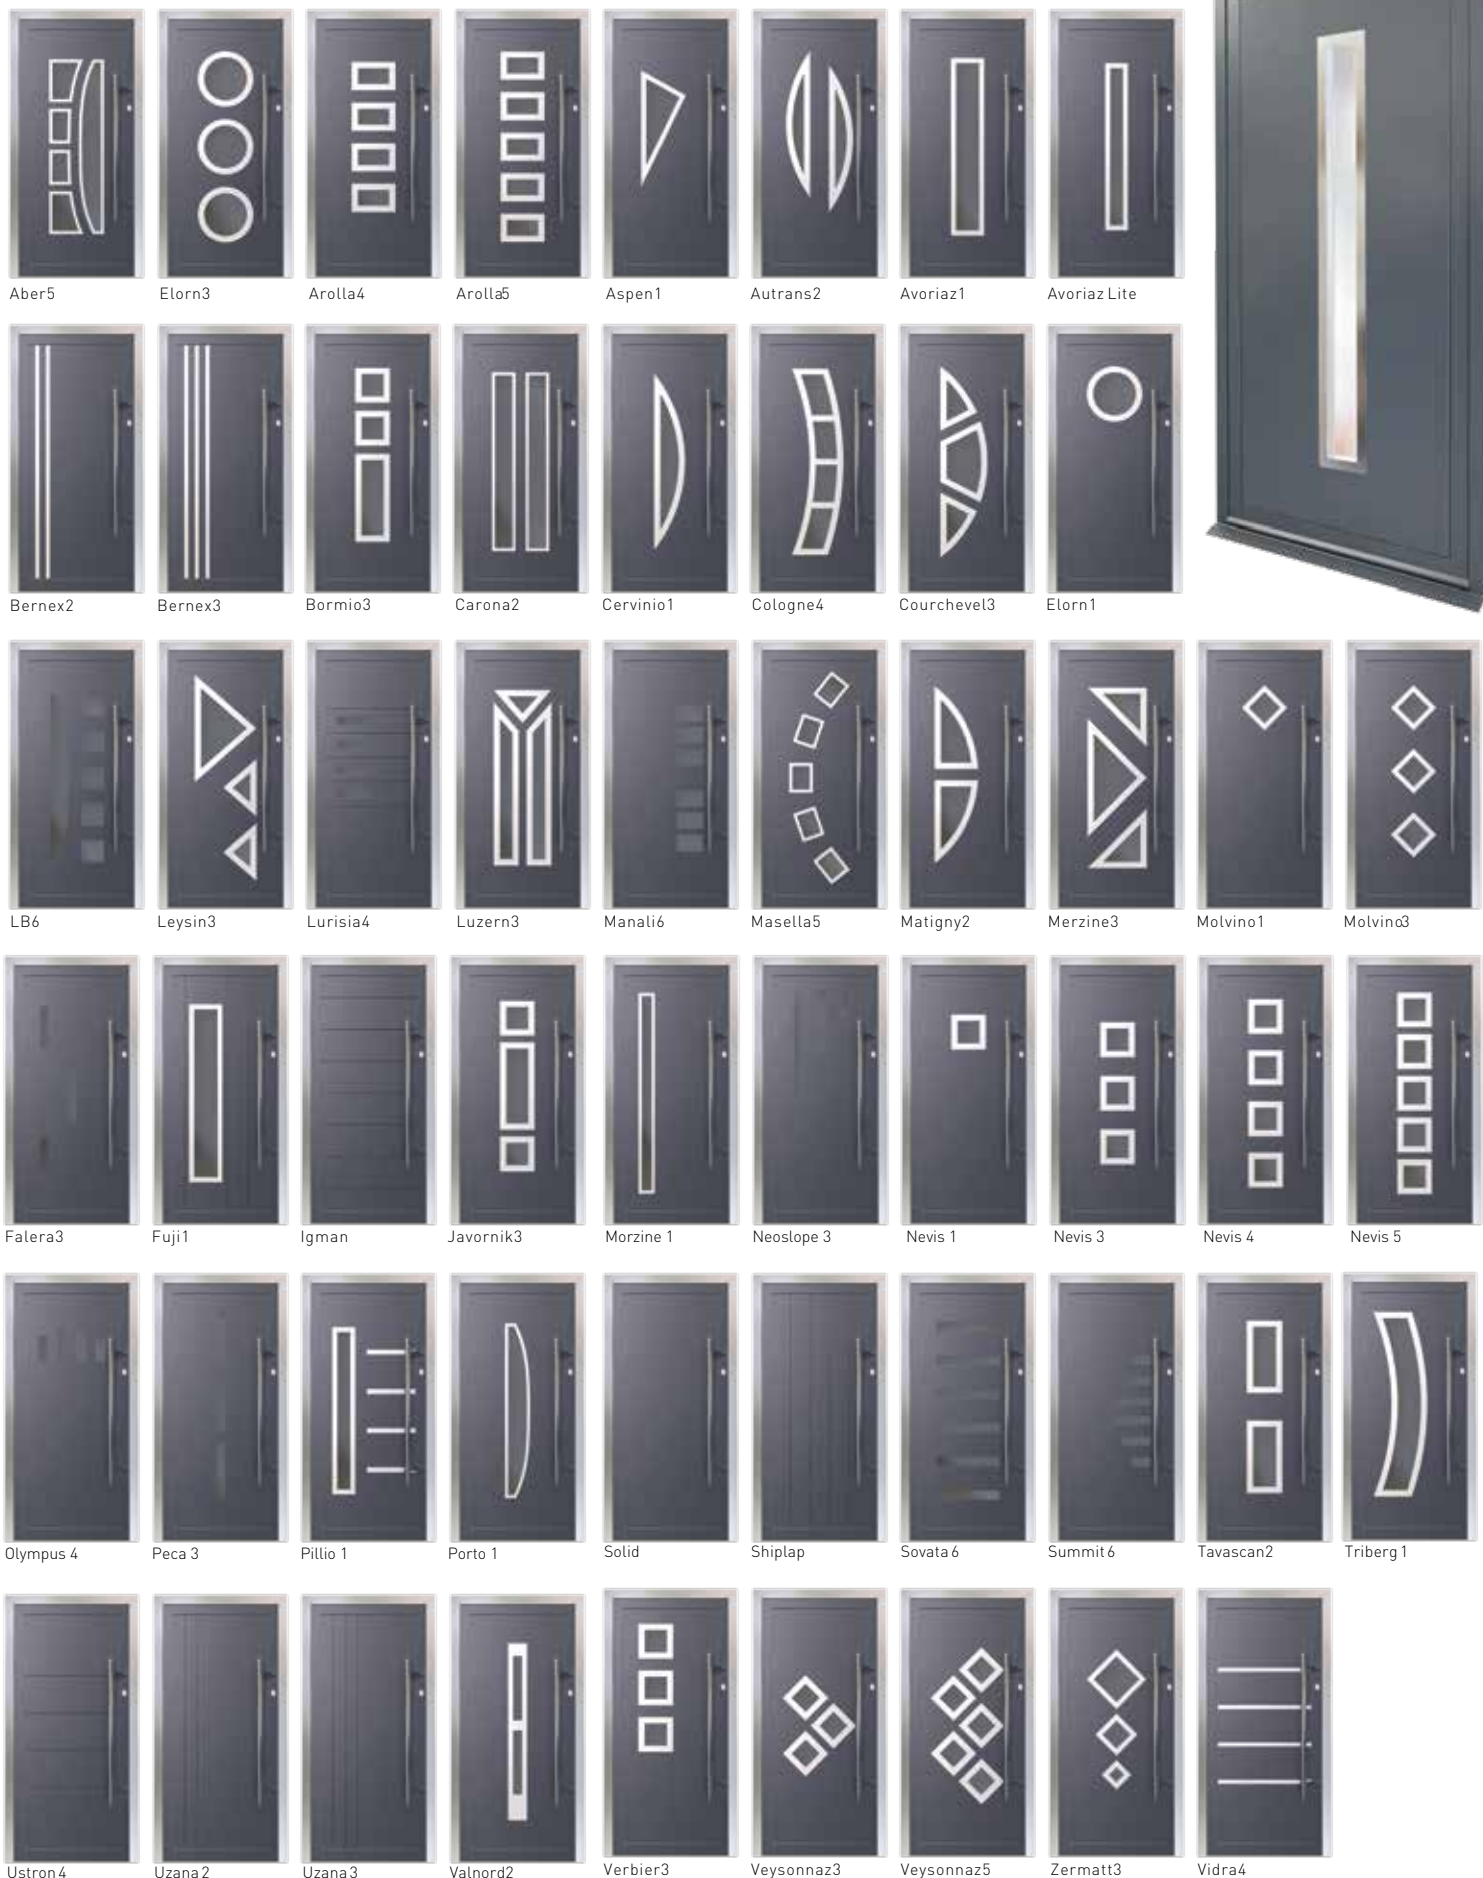




## HERITAGE RANGE WINDOWS

Alitherm Heritage provides the ideal solution for heritage applications such as listed building renovations and large scale replica-refurbishment projects where planning constraints are to be considered.

The Alitherm Heritage window is designed to be built as a series of horizontal modules which can be stacked using horizontal couplers to form a multi-part window featuring a specially design drip bar between modules.

Alitherm Heritage Windows	
Application	Domestic
Finish	Single / dual colour, marine quality polyester powder coated
Profile Sash	Square
Security	Multi-point locking espag, Inline locking handle as standard
Frame depth	47mm
Max weight	40kg TH / 28kg SH
U Value	1.0 -1.5 w/m <sup>2</sup> k
SH Max o/a width	600mm
SH Max o/a height	1400mm
TH Max o/a width	1400mm
TH Max o/a height	1400mm
WER	B
Air Tested	Class 4, 600Pa
Water Tested	Class 9a, 600Pa
Wind Tested	Class AE, 2400Pa
British Standards	KM 81580 / PAS 24:2012 / KM81543 / BS4873
Add ons	20mm, 42mm
Bead	Internal / External
Cills	85mm, 150mm, 190mm, 225mm, 300mm
Glazing	DG 28mm
Astragal Bar	25mm / 41mm flat bar

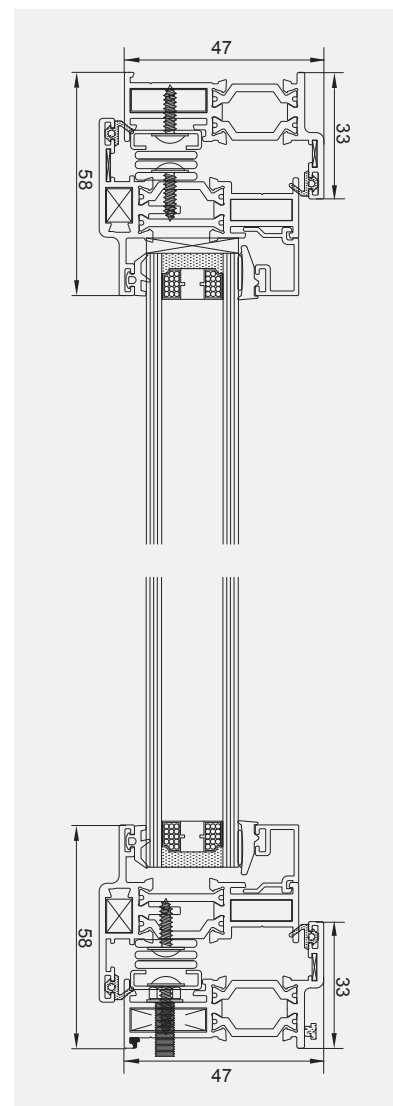





#### EFFICIENT

Thermally efficient U Value  
of between 1.0 - 1.5W/m<sup>2</sup>k



**GLAZING**  
Double and triple  
glazed option

U Value  
1.0-1.5W/m<sup>2</sup>K

Certified  
PAS24:2012

Certified  
BS 4873

Certified  
Document L

Dual  
Colour

TH Max Height  
1300mm

Multipoint  
Lock Espag

TH Max Width  
1400mm

Max Weight  
40kg



#### COLOURS

Single or dual colour,  
marine quality polyester  
powder coated



**ENERGY SAVING**  
WER Rating of B



#### AESTHETIC

Slim 58mm sightlines

#### SECURE

High security  
Multipoint locking



# HERITAGE RANGE DOORS


The Smart Alitherm Heritage door is the ideal replacement for steel balcony doors on heritage applications such as building renovations or apartment conversions. The Alitherm Heritage door provides the solution for conservation areas where planning regulations require a like-for-like product replacement.

Alitherm Heritage door profiles feature the system's signature slim sightlines and elegant lines that complement Smart's existing Alitherm Heritage window and mimic those of steel doors. The system has all the advantages of modern aluminium profiles that feature polyamide thermal breaks, allowing the system to achieve a U Value of 1.5 W/m<sup>2</sup>k when installed with a suitable sealed unit.


## Alitherm Heritage Doors

Application	Domestic
Finish	Single / dual colour, marine quality polyester powder coated
Profile Sash	Square
Security	Ultion Cylinder as standard - Multipoint locking
Frame depth	47mm
Max weight	60kg
U Value	1.5 w/m <sup>2</sup> k using a 1.0w/m <sup>2</sup> k glass unit
Max Sash width	900mm
Max Sash height	2100mm
Sightlines	59mm
British Standards	KM 81580 / PAS 24:2012 / KM81543 / BS4873
Add ons	20mm, 42mm
Bead	Internal
Cills	85mm, 150mm, 190mm, 225mm, 300mm
Glazing	DG 28mm
Astragal Bar	25mm / 41mm flat bar

Door outer frame & sash

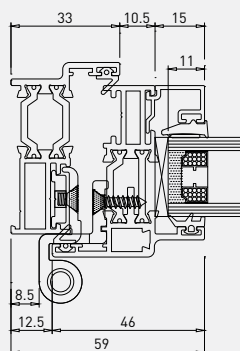

Opening out French doors horizontal section through lock

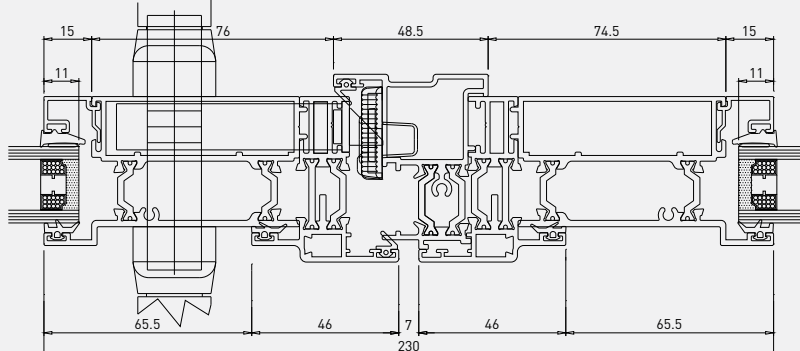






**SECURE**  
High security  
Multipoint locking  
system



**EFFICIENT**  
Thermally efficient  
U Value of 1.5W/m<sup>2</sup>k

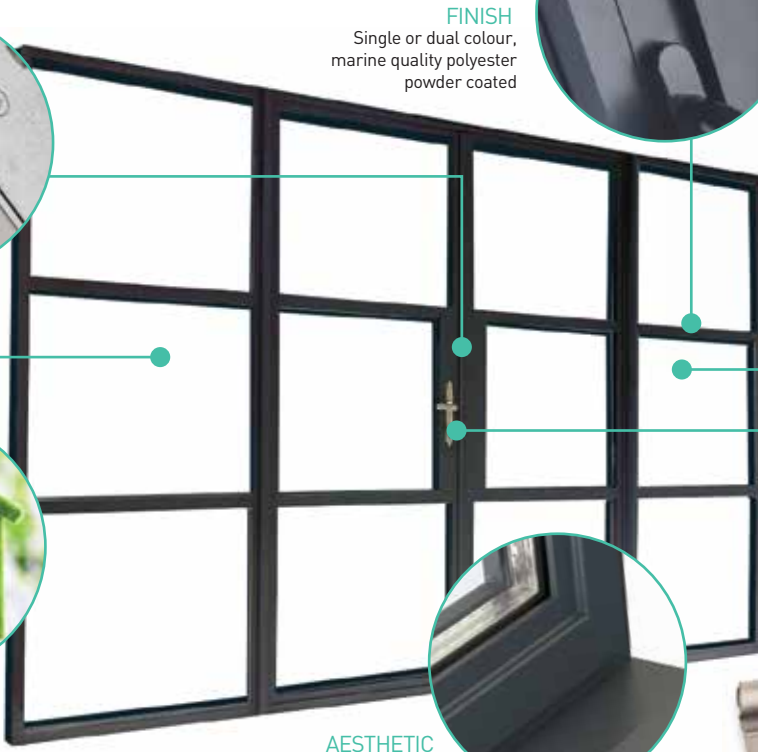

**FINISH**  
Single or dual colour,  
marine quality polyester  
powder coated



**AESTHETIC**  
Slim 59mm sightlines



**GLAZING**  
Double and triple  
glazed option

**ULTION**   
High security 3 star  
cylinder as standard



U Value  
1.5W/m<sup>2</sup>K



Certified  
PAS24:2012



Certified  
BS 4873



Certified  
Document L



Dual  
Colour



Max Sash Height  
2100mm



Multipoint  
ULTION



Max Sash Width  
900mm








Smart Wall is a thermal shop front screen and door system suitable for all types of ground floor treatment where enhanced thermal performance is required. The system is ideal for use in schools, colleges and other educational buildings.

Smart Wall has been successfully tested to PAS 24:2012, LPS 1175 level 2 and BS EN 1627 Level 3 for enhanced security performance making the door one of the best performing fully thermally broken screen and entrance doors available in the UK. Screen work is either beaded or pocket glazed. Smart Wall complies with the latest requirements of Document L for thermal transmittance.

**ULTION**   
High security 3 star  
cylinder as standard



Smart Wall	
Application	Commercial
Finish	Single / dual colour, marine quality polyester powder coated
Profile	Flat
U Value	1.8 w/m <sup>2</sup> k Doors / 1.4 w/m <sup>2</sup> k Screens
Security	Ultion (diamond accredited) Cylinder as standard - Hook lock
Profile depth	100mm
Profile width	53mm
Single Door Max Width (mm)	1100mm (per sash)
Single Door Max Height (mm)	2500mm (per sash)
Single Door Max Weight (kg)	80kg
Add ons	53mm
Bead	External
Cills	85mm, 150mm, 190mm, 225mm, 300mm
Glazing	DG 28mm


  
U Value  
1.4 & 1.8W/m<sup>2</sup>K

  
Certified  
Document L

  
Dual  
Colour

  
TH Max Height  
2500mm

  
Max Width  
1100mm

  
Max Sash Weight  
80kg







Smart Wall doors are weather rated to BS 6375 and are available with anti-finger trap door sections and drainable low thresholds.


All profiles feature polyamide barriers to maximise thermal performance and can be internally or externally glazed. Unlike non-thermal alternatives, Smart Wall is available in dual colour from an extensive range of standard and non-standard finishes. Smart Wall complies with the latest requirements of Document L for thermal transmittance.

Midrail option for doors

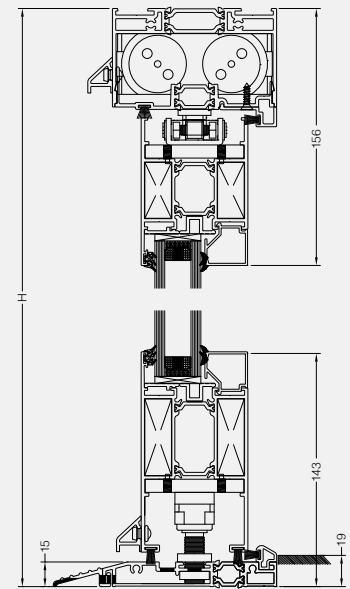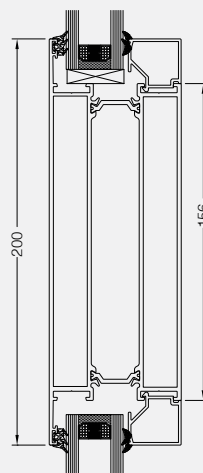

Vertical section

Horizontal section

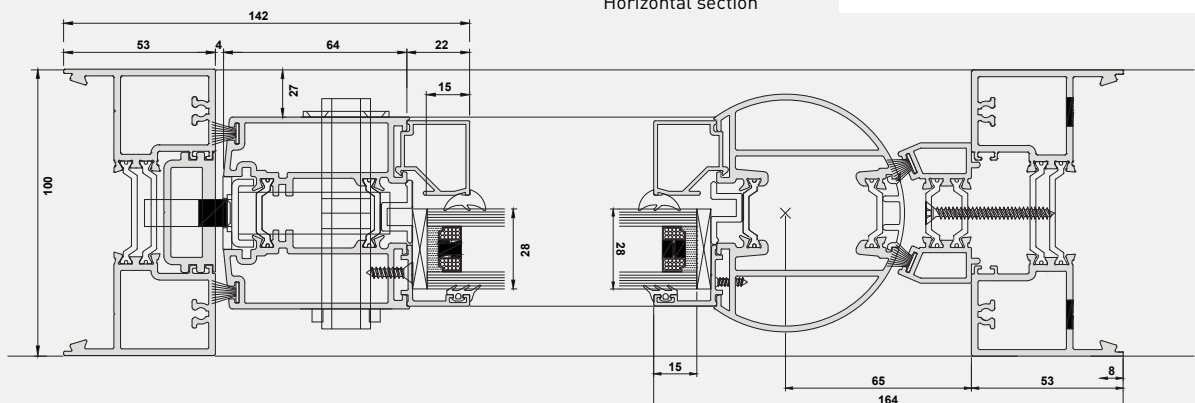





# SHOP FRONT

Shop Front is a modular screening solution, combining the benefits of off-site manufacture with on-site assembly. Screen modules are constructed off site from square cut profiles joined using self tapping screws. These modules can then be rapidly assembled on site, intuitively clipping together the mullions to form one continuous screen.


This rapid assembly method offers an economical solution for low rise screening with slim sightlines of 50mm. Designed for the UK climate, all fixings on the screen are manufactured from corrosion resistant material to provide protection from both atmospheric and electrolytic degradation. The system offers drainage trays, ensuring the screens performance in all weathers.

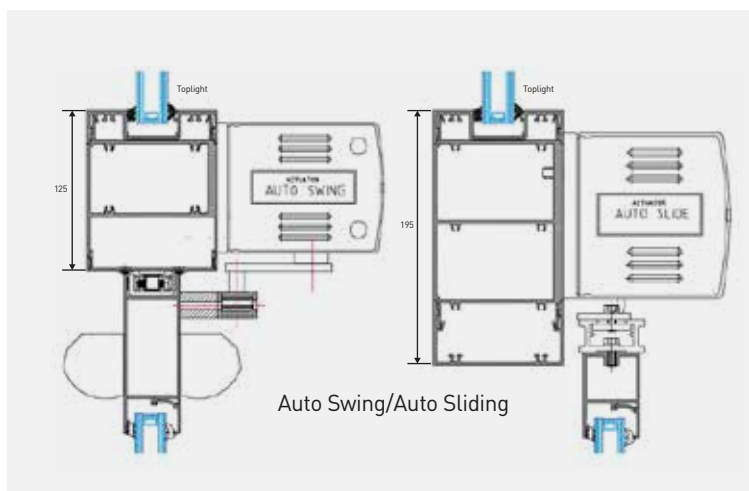

Auto Swing/Auto Sliding

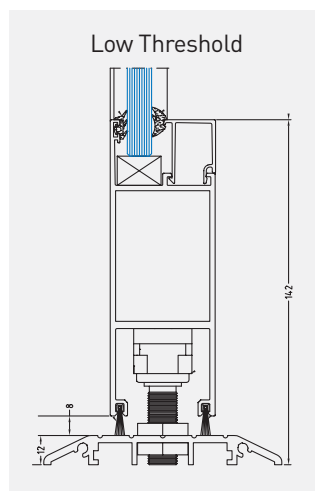

Low Threshold

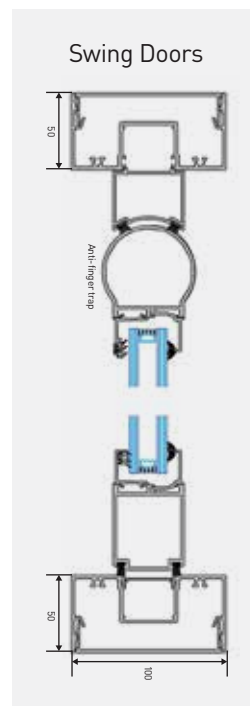

Swing Doors

## Shopline

Application	Commercial
Finish	Single colour marine quality polyester powder coated
Profile	Flat
Security	Ution (diamond accredited) Cylinder as standard - Hook lock
Profile depth	100mm
Profile width	50mm
Single Door Max Width (mm)	1100mm (per sash)
Single Door Max Height (mm)	2500mm (per sash)
Single Door Max Weight (kg)	110kg
Add ons	50mm
Bead	External
Cills	85mm, 150mm, 190mm, 225mm, 300mm
Glazing	DG 24mm



Certified Document L



Single Colour



TH Max Height 2500mm



Max Width 1100mm



Max Sash Weight 110kg



# COLOUR OPTIONS

As an aluminium installer, it's important you offer a wide selection of colour options that appeal to every audience. Some property owners want to add a unique touch to their home. We can offer any RAL or BS codes colours.


With so many different options available, there is a colour to suit every project, every property and every personal taste. We offer dual colour on all our aluminium products, with the exception of Shopline, for the best of both worlds, matching both the inside and the outside of a property.



## SENSATIONS



## COTSWOLD

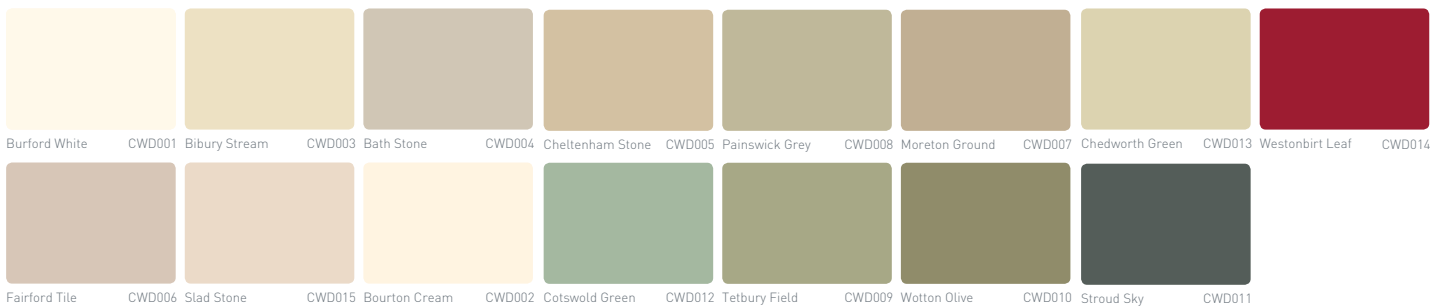



## NATURALS



\*Colours are a guide only.  
Subject to availability.

## CILL DETAILS

Cill end caps available in black or white.

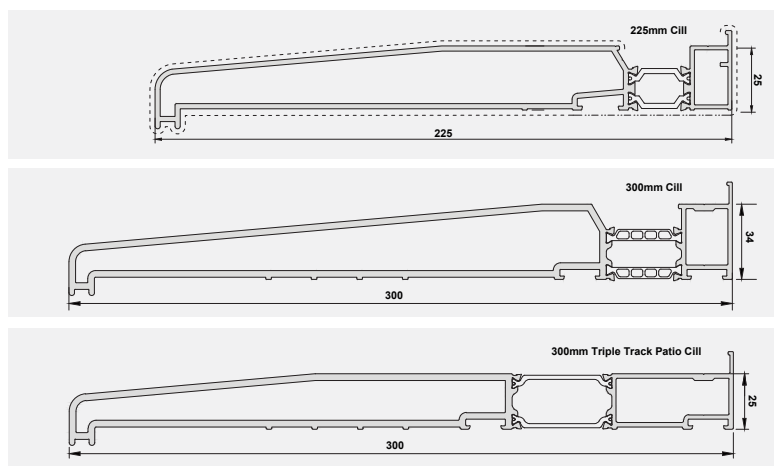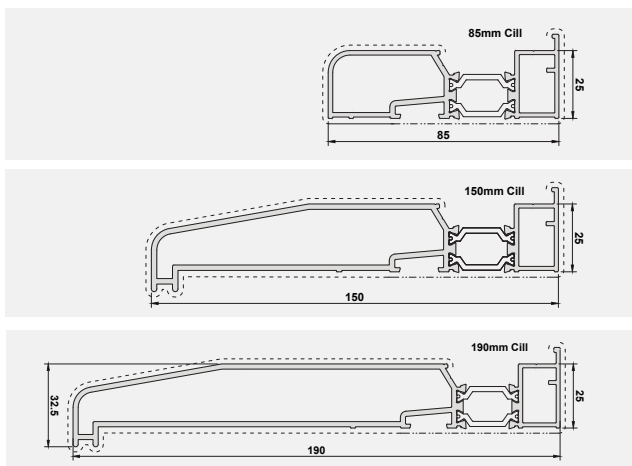


# HARDWARE OPTIONS

Our range of hardware helps provide you with those vital finishing touches for your new window and door system. From handles to hinges, the style and colour of the accessories you select will have a significant effect on the final aesthetic look of your door.

Whether you want a modern, contemporary feel, or prefer a more traditional look, we have a wide range of style and colour options to choose from.



		White	Black	Anthracite
BI-FOLDING DOORS	Main handle (Lever (straight) handle)	✓	✓	✓
	Intermediate handle	✓	✓	✓
	D handle	✓	✓	✓
	Magnetic catch	✓	✓	✓
	Trickle vents	✓	✓	✓
SLIDING PATIO DOORS	Long lever handle	✓	✓	✓
	Sliding Door D Handle	✓	✓	✓
WINDOWS	Inline handle	✓	✓	✓
ALITHERM PLUS DOORS	Lever lever handle	✓	✓	✓
	Pole handle	✗	✗	✗
	Letterplate	✓	✓	✗
	Knocker	✓	✓	✗
	Numerals	✓	✓	✗

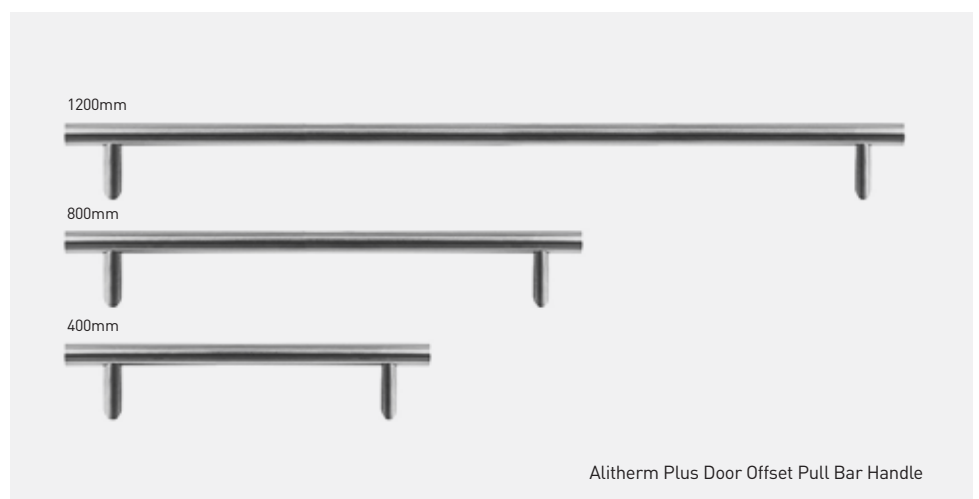





Bi-fold D Handle



Bi-fold Magnetic Catch



Patio Door D Handle & Lever/Lever Handle

Chrome	Satin Silver	Polished Gold	Brushed Chrome
✓	✓	✓	✗
✓	✓	✓	✗
✓	✓	✓	✗
✓	✓	✓	✗
✗	✗	✗	✗
✗	✓	✗	✗
✗	✓	✗	✗
✓	✓	✓	✗
✓	✓	✓	✗
✗	✗	✗	✓
✓	✓	✓	✗
✓	✓	✓	✗
✓	✓	✓	✗



Bi-fold Intermediate Handle



Alitherm Window Handle

## GLAZING OPTIONS

Standard glass on all aluminium products	Double-glazed unit -28mm / Softcoat / Argon / Thermobar Black Spacer	Triple-glazed unit - 36mm / 32mm / Softcoat / Argon / Thermobar Black Spacer
Std/Low-iron	Float	Float
Glass centre pane U-Value	1.2	0.8 (36mm) 0.9 (32mm)
Glass solar gain factor	0.71	0.62

\*Alternative glazing available on request.

Building control requires doors to satisfy either a U Value of 1.8 or lower or a WER of E or better.

Building control requires windows to satisfy either a U Value of 1.6 or lower or a WER of C or better.



Blinds in glass option available

